

Bicycle Racks > Horizontal

1300 780 450

VANDAL RESISTANT


AS2890.3 COMPLIANT

Compact CBR1SCTM
Fully-welded

CBR1SCTM
Hot Dipped Galvanised
SCBR1SCTM
Stainless Steel




40 x 8mm Base Rails

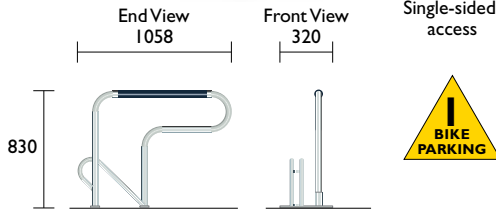


Compact CBR2SCTM
Fully-welded

CBR2SCTM
Hot Dipped Galvanised
SCBR2SCTM
Stainless Steel

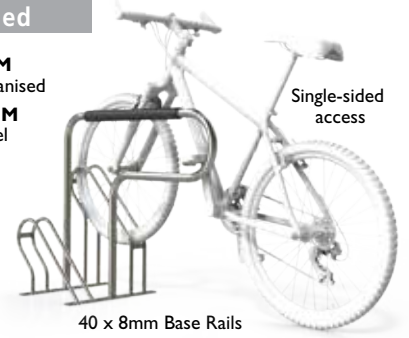

Single-sided access

40 x 8mm Base Rails

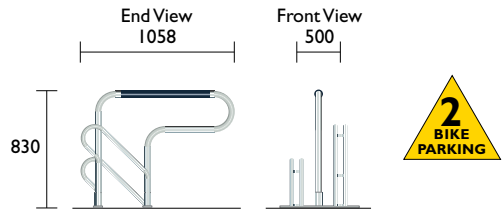

Compact CBR4SCTM
Fully-welded

CBR4SCTM
Hot Dipped Galvanised
SCBR4SCTM
Stainless Steel

Vandal Resistant




plastic sleeve protects bicycle

32NB Pipe Leaning Rails

Ø19 Pipe Wheel Supports


40 x 8mm Base Rails
Single-sided access

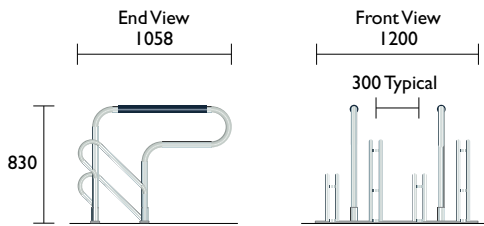


Compact CBR6SC
Fully-welded

CBR6SC
Powder Coated
CBR6SCG
Hot Dipped Galvanised
SCBR6SC
Stainless Steel

plastic sleeve protects bicycle
32NB Pipe Leaning Rails
Ø19 Pipe Wheel Supports

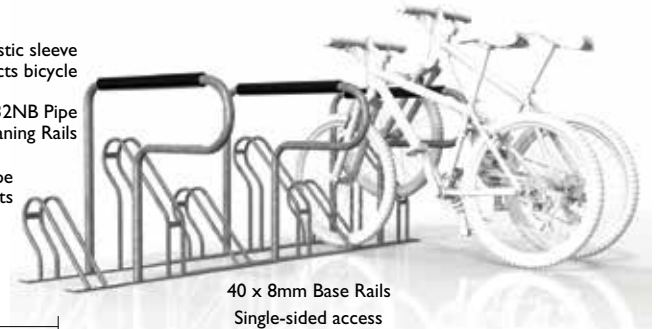

40 x 8mm Base Rails
Single-sided access

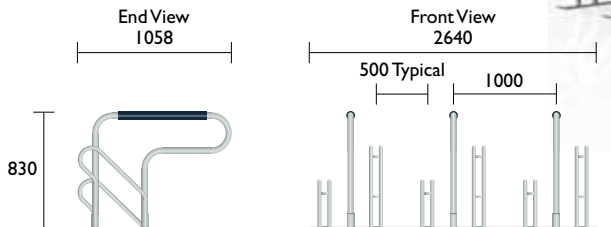

Bicycle Spacings 500mm

Provides wider spacings for easier parking

These fully welded units are supplied ready to be bolted down. They are available in either hot dipped galvanised or stainless steel. Being fully welded, they are more suitable for vandal resistant applications.

Material Specifications (General)

Mild steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Pipe / 8mm Plate / Hot dipped galvanised / Powder coated in a range of colours
Stainless steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Stainless steel pipe / 8mm Plate / Linished

